
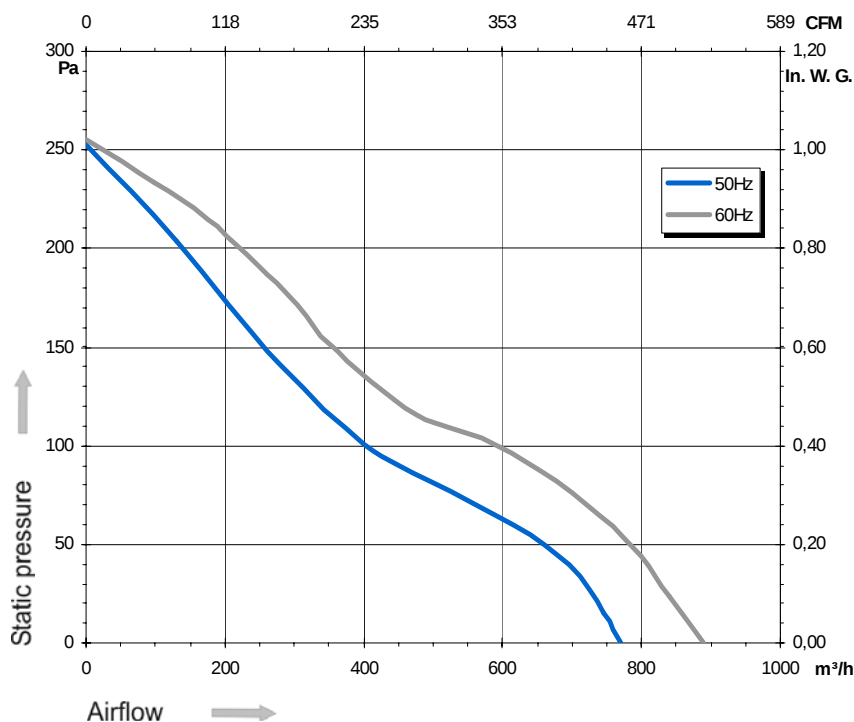
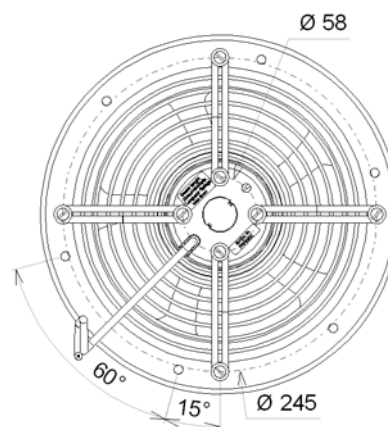


Ind. c - Revision : 02-2005


## 2VGV25 200A

## P/N Z04-04

| Voltage | Frequency | Input power | Current | Capacitor | Airflow | Speed rotation | Noise level | Rotation direction | Operating temperature |
|---------|-----------|-------------|---------|-----------|---------|----------------|-------------|--------------------|-----------------------|
| V       | Hz        | Wa          | A       | µF        | m³/h    | RPM            | dBA         |                    | Min / Max             |
| 230     | 50        | 61          | 0,28    | 2,0       | 770     | 2 855          | 67          | R                  | -40°C / +70°C         |
| 230     | 60        | 85          | 0,39    | 2,0       | 890     | 2 920          | 70          | R                  | -40°C / +70°C         |

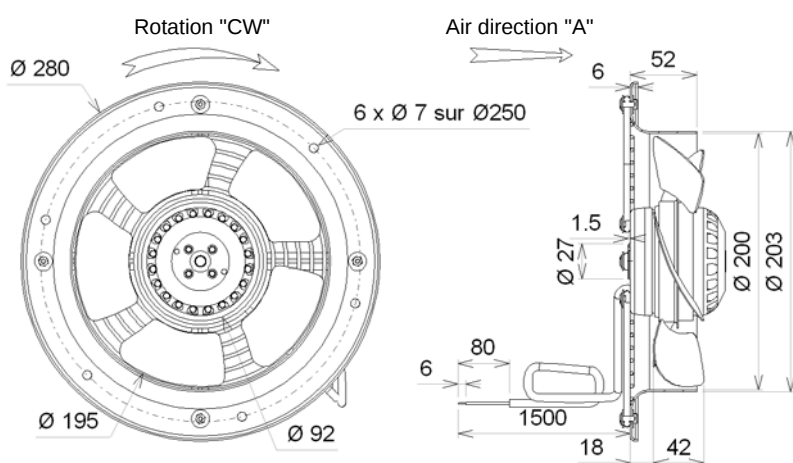

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G6.3 balancing
- Rotor and impeller : black paint
- Ring : black paint
- Stainless steel finger guard

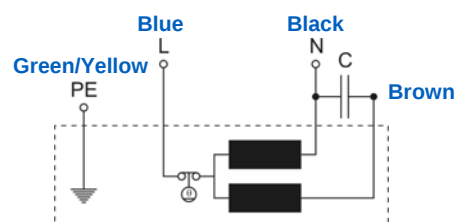

| Capacitor for 50Hz | Capacitor for 60Hz | Connecting box | Connector |
|--------------------|--------------------|----------------|-----------|
| 19008-0            | 19008-0            | 39658          | 09145-0   |

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.