





Ind. b - Revision : 10-2003

## 4VPRt45 400V

## P/N R12-33




| Voltage | Frequency | Input power | Current | Capacitor | Airflow | Speed rotation | Noise level | Rotation direction | Operating temperature |
|---------|-----------|-------------|---------|-----------|---------|----------------|-------------|--------------------|-----------------------|
| V       | Hz        | Wa          | A       | μF        | m³/h    | RPM            | dBA         | ↻                  | Min / Max             |
| 400     | 50        | 162         | 0,36    | -         | 3 725   | 1 200          | 70          | L                  | -20°C / +40°C         |
| 400     | 60        | 204         | 0,40    | -         | 3 700   | 1 255          | 71          | L                  | -20°C / +60°C         |

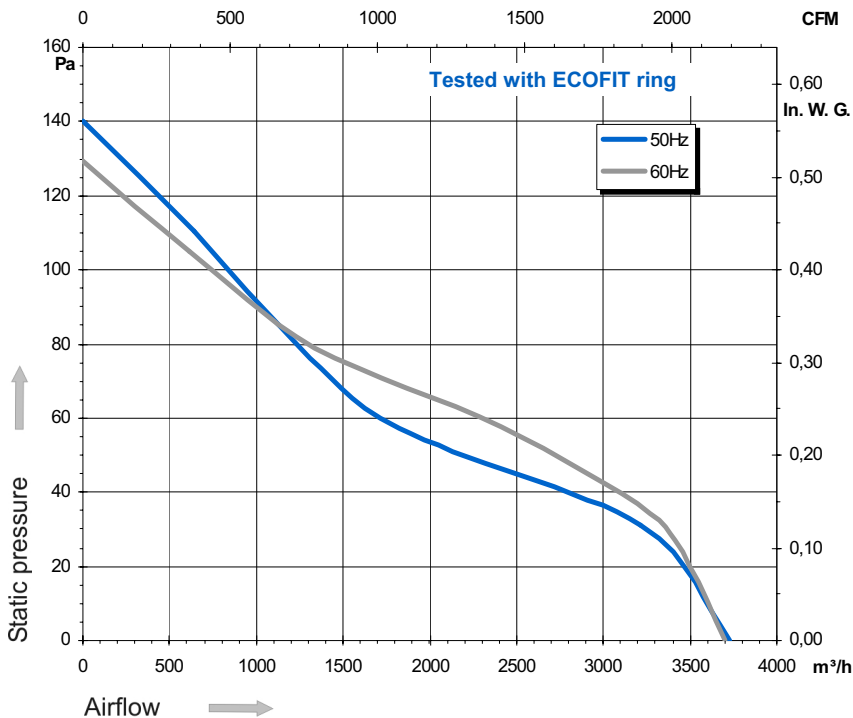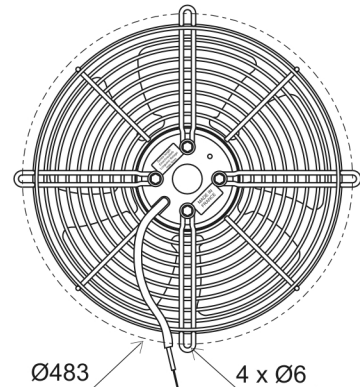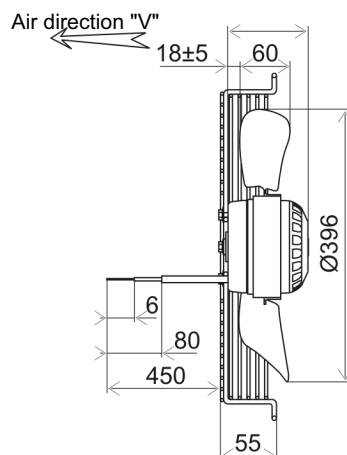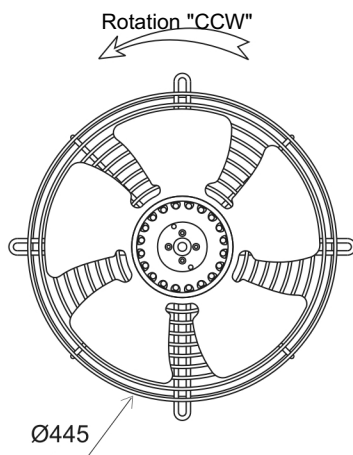

- Ball bearing
- Class F winding
- IP44 protection
- G6.3 balancing
- Zinc coated impeller
- Rotor and impeller : black paint
- Basket finger guard : black paint

Capacitor for 50Hz - Capacitor for 60Hz - Connecting box 39658 - Connector 09145-0

Green/Yellow Blue Black Brown

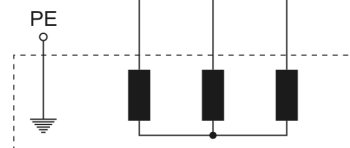

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.