

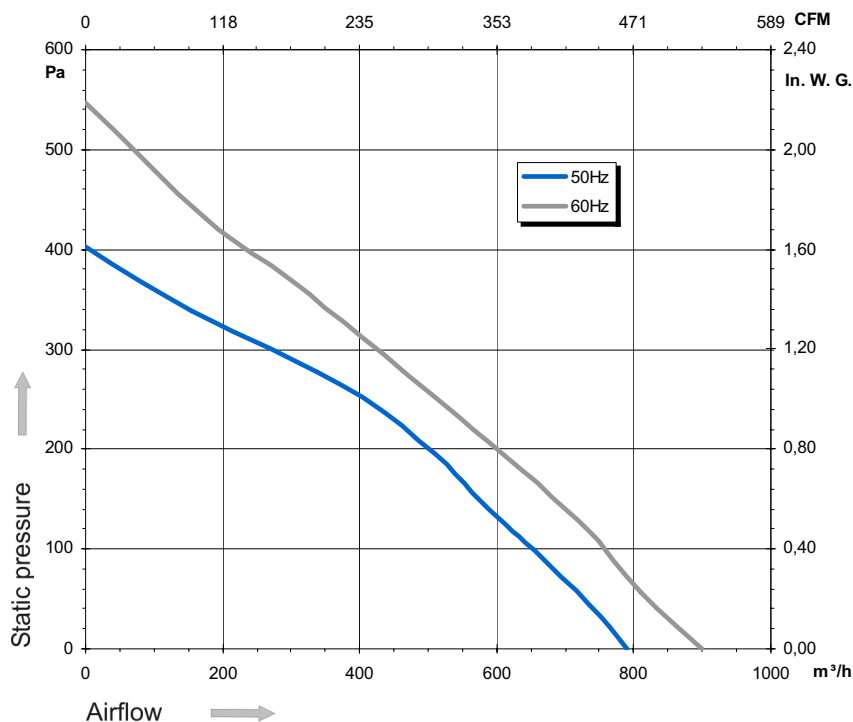
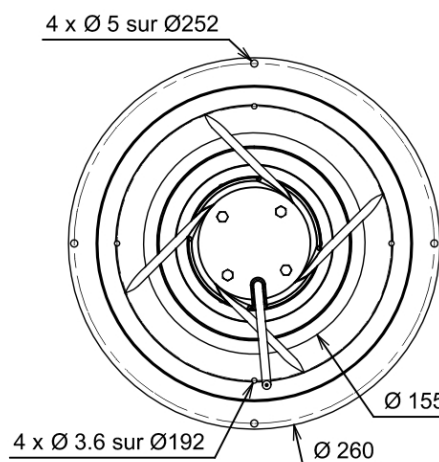


Ind. 0 - Revision : 12-2003

2RRE25 220x45R P/N C36-A4

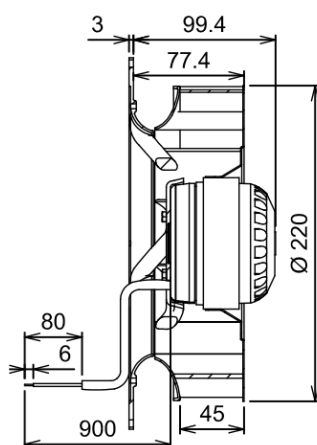


Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	93	0,41	3,0	790	2 760	69	L	-20°C / +70°C
230	60	119	0,52	3,0	900	3 150	72	L	-20°C / +70°C

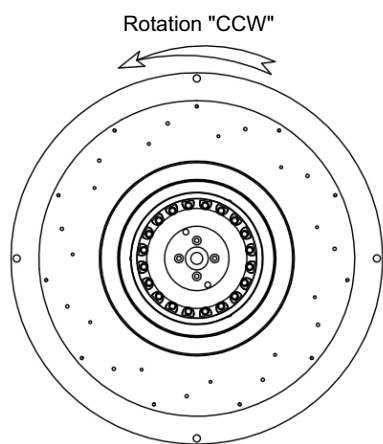

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- PA 6/6 plastic impeller
- Rotor : black paint
- Black painted aluminium reversed-inletcone

Capacitor for 50Hz 19012-0
 Capacitor for 60Hz 19012-0
 Zinc Coated 21194-a

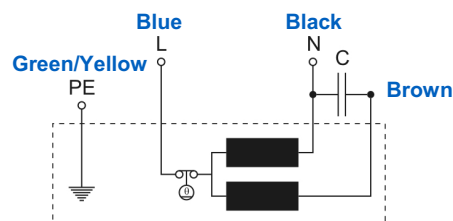

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.