

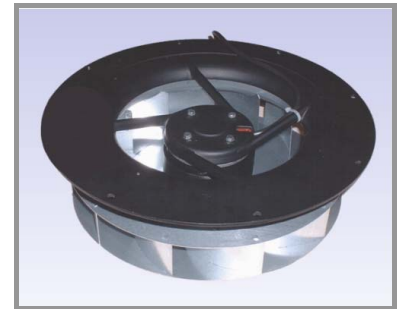
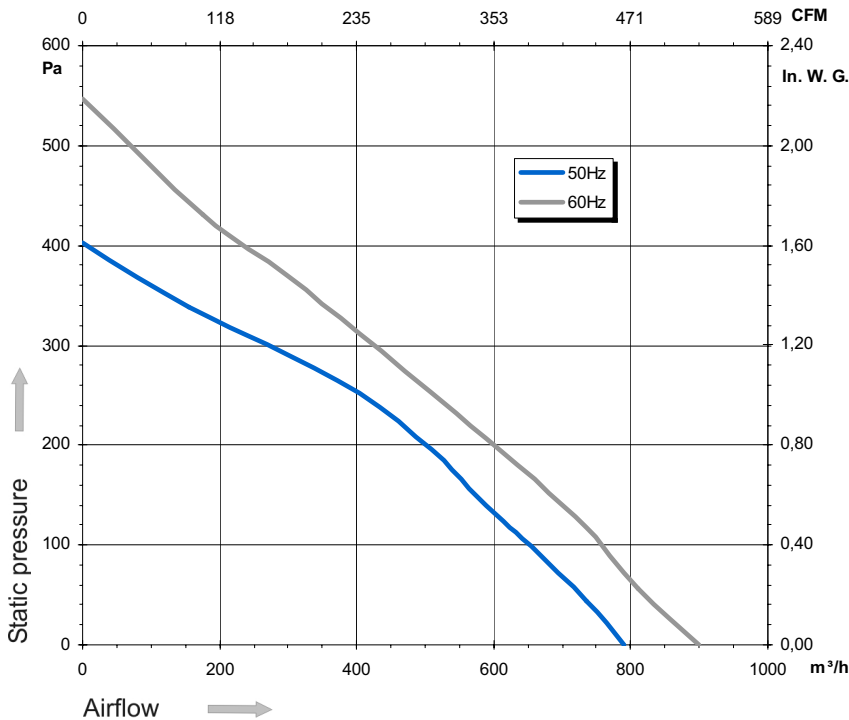
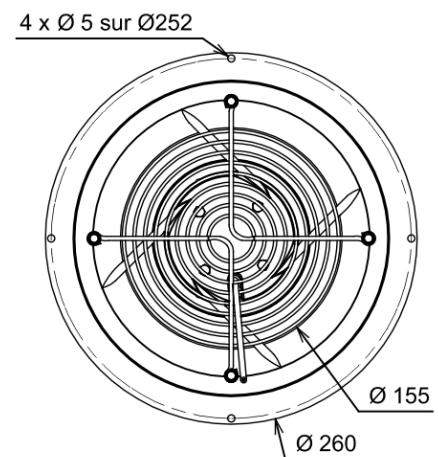


2RRE25 220x45R P/N C41-A5

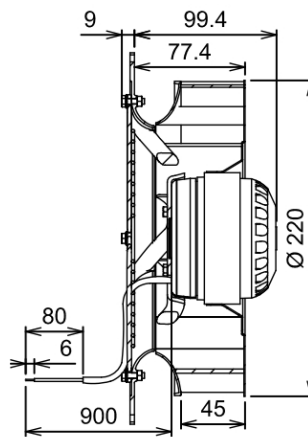

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	93	0,41	3,0	790	2 760	69	L	-20°C / +70°C
230	60	119	0,52	3,0	900	3 150	72	L	-20°C / +70°C

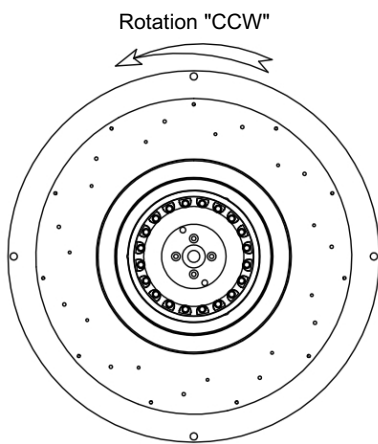

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- PA 6/6 plastic impeller
- Rotor : black paint
- Black painted aluminium reversed-inletcone
- Finger guard

Capacitor for 50Hz Capacitor for 60Hz

19012-0 19012-0

