
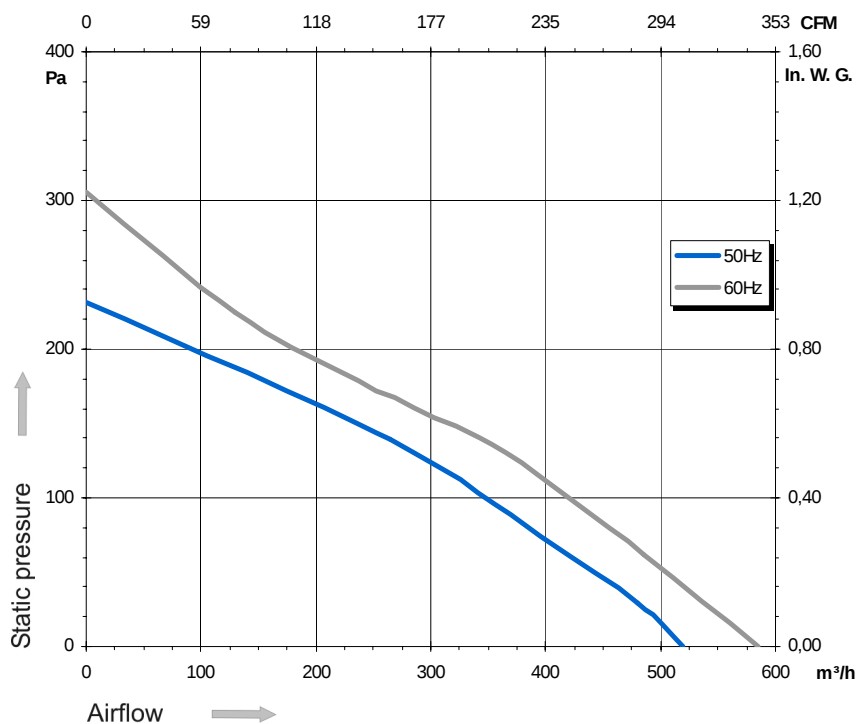
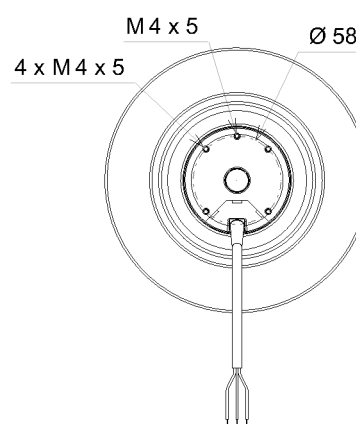
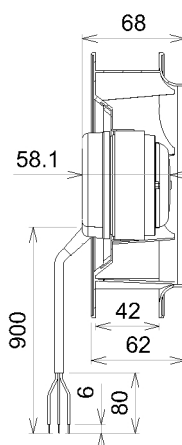


Ind. 0 - Revision : 09-2004

2RREA3 175x42R P/N D04-A5


Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	36	0,16	1,5	520	2 560	59	R	-20°C / +70°C
230	60	44	0,20	1,5	585	2 895	62	R	-20°C / +70°C

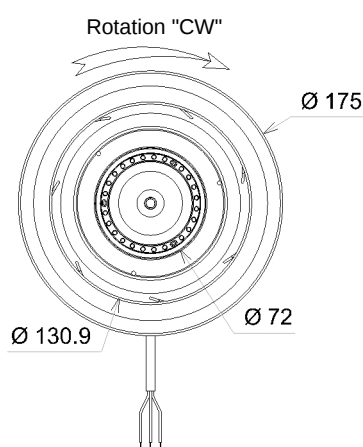

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Rotor : black paint
- PA 6/6 plastic impeller

Capacitor for 50Hz
19005-0

Capacitor for 60Hz
19005-0

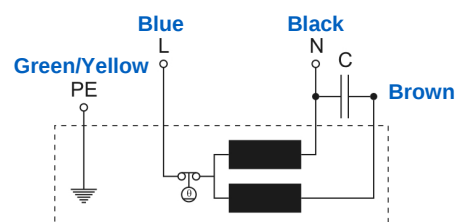

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.