
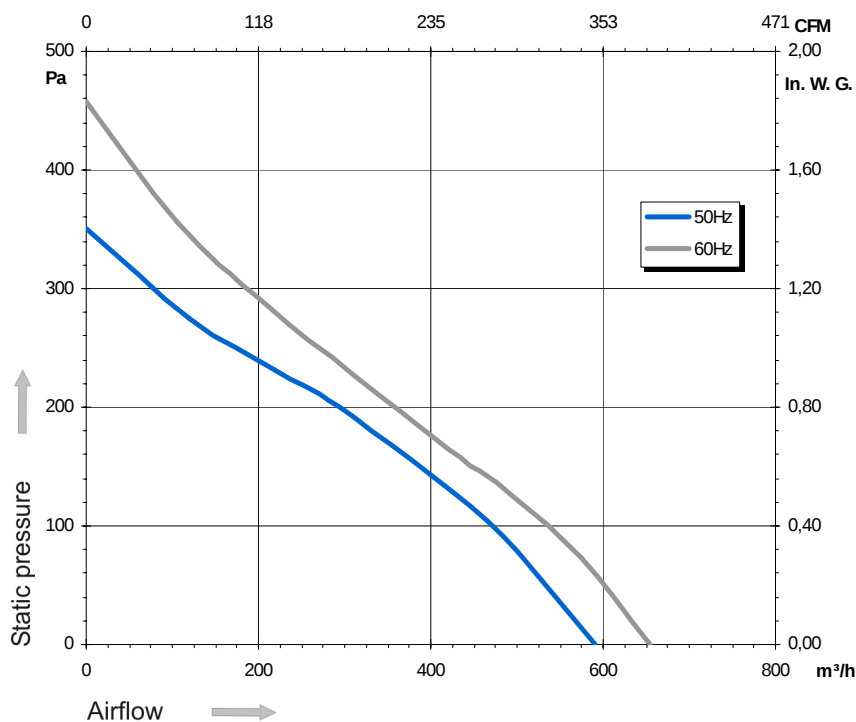
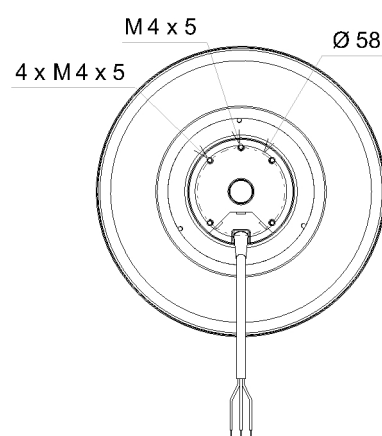
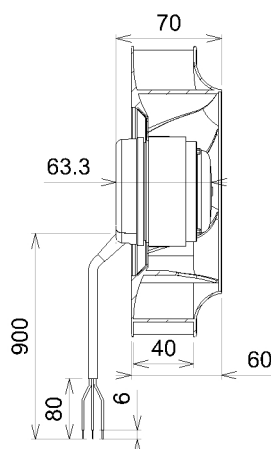
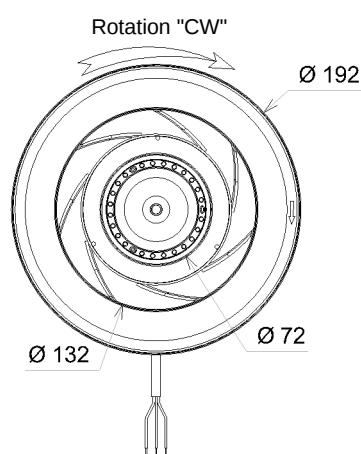


Ind. a - Revision : 09-2004


2RREA4 192x40R P/N D04-A7

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	μF	m³/h	RPM	dBA	↻	Min / Max
230	50	59	0,26	2,0	590	2 495	63	R	-20°C / +70°C
230	60	73	0,32	2,0	655	2 740	66	R	-20°C / +70°C

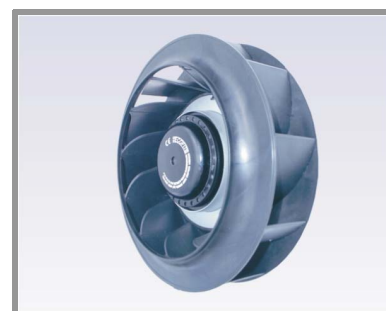

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Rotor : black paint
- PP plastic impeller

Capacitor for 50Hz 19008-0 Capacitor for 60Hz 19008-0 Zinc Coated 21181-a Inlet cone 16043-a

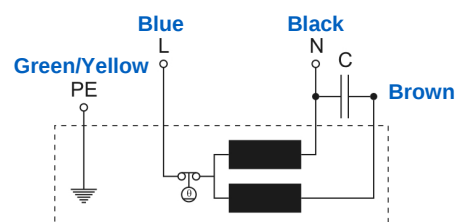

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.