
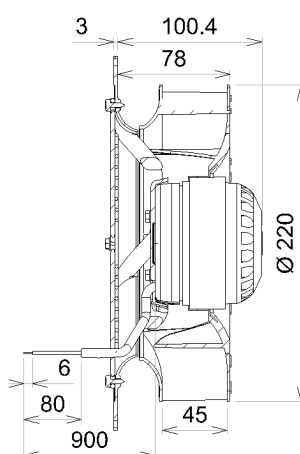




Ind. a - Revision : 09-2004

2RREu25 220x45R P/N C45-D0


Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
115	50	104	0,91	10,0	810	2 715	69	L	-40°C / +70°C
115	60	151	1,32	10,0	880	2 965	72	L	-40°C / +70°C

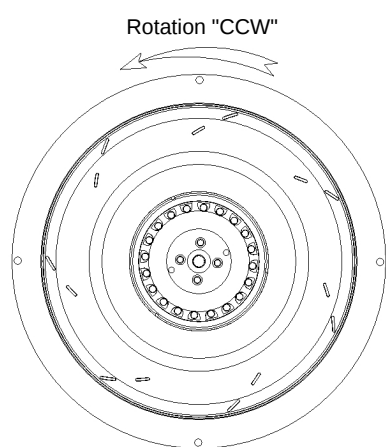

4 x Ø 5 sur 252

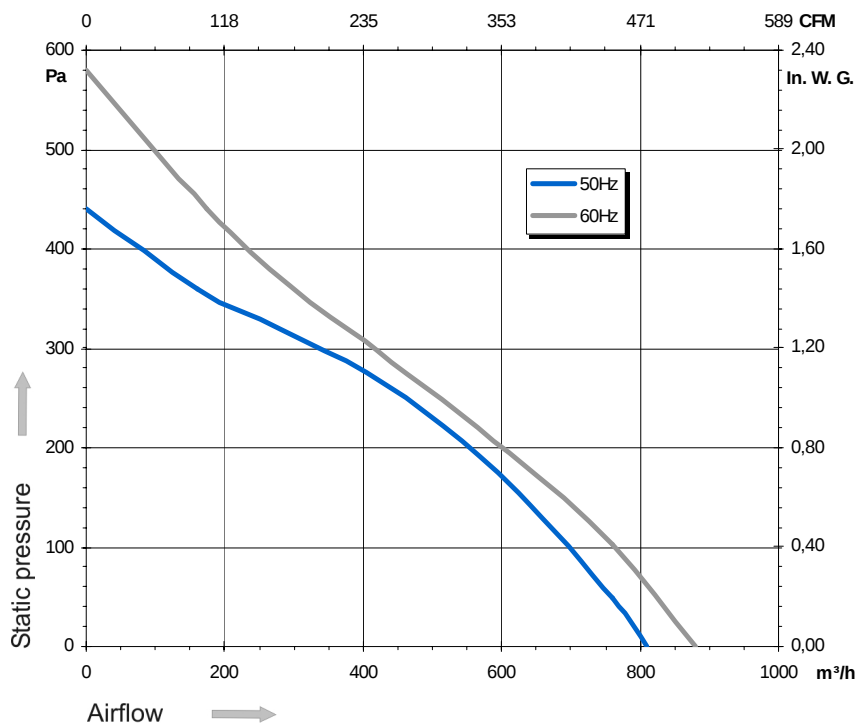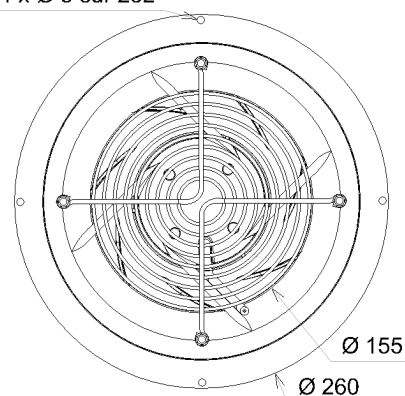

- Ball bearing
- Class F winding
- IP44 protection
- G2.5 balancing
- PA 6/6 UL 94 V-0 plastic impeller
- Rotor : black paint
- Black painted aluminium reversed-inletcone
- Finger guard
- UL approved motor

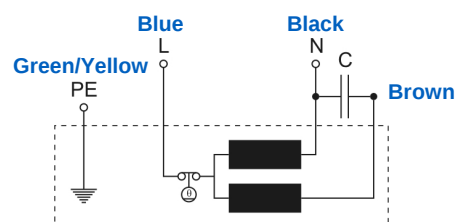

Capacitor for 50Hz
19223-0

Capacitor for 60Hz
19223-0

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.