
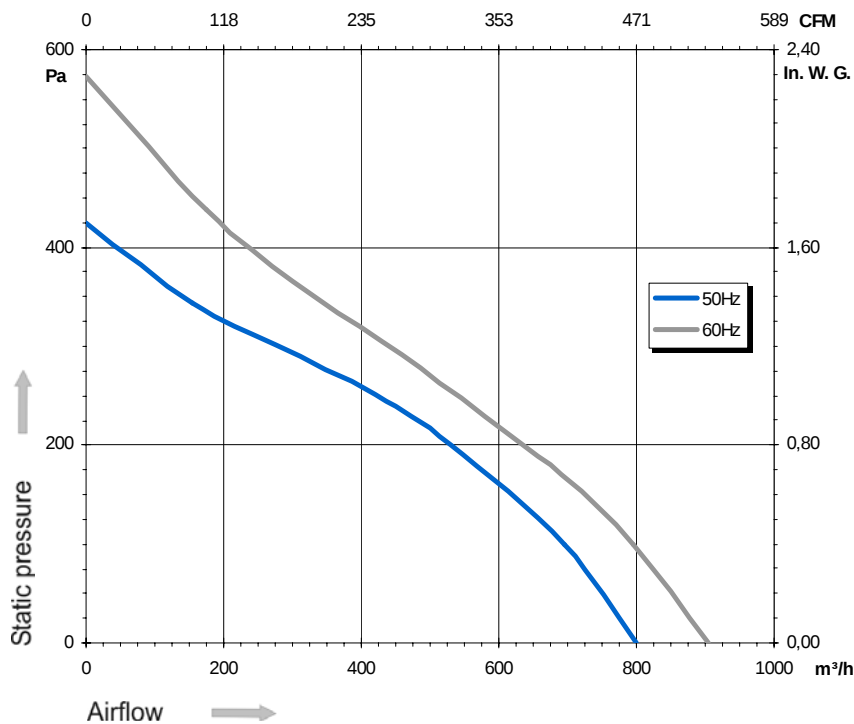
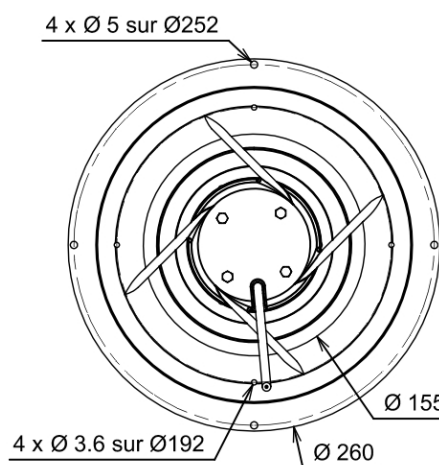
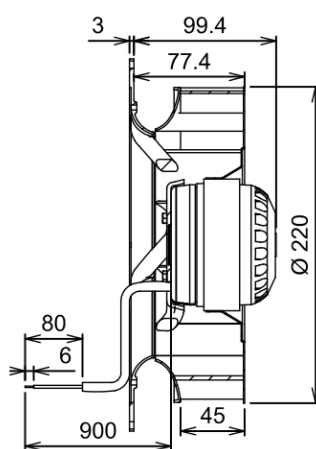



Ind. a - Revision : 04-2005

2RREu25 220x45R P/N C36-B4

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	97	0,45	3,0	800	2 615	70	L	-40°C / +70°C
230	60	121	0,53	3,0	905	2 920	72	L	-40°C / +70°C

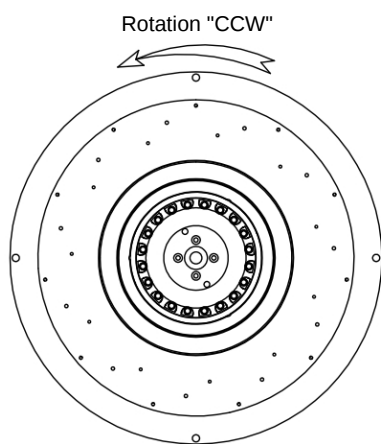

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- PA 6/6 UL 94 V-0 plastic impeller
- Rotor : black paint
- Black painted aluminium reversed-inletcone
- UL approved motor

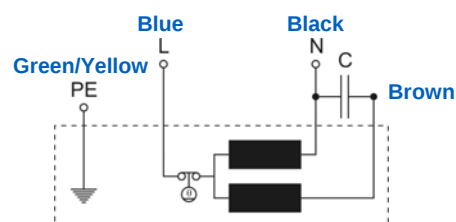

Capacitor for 50Hz	Capacitor for 60Hz	Zinc Coated
19219-0	19219-0	21194-a

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.