
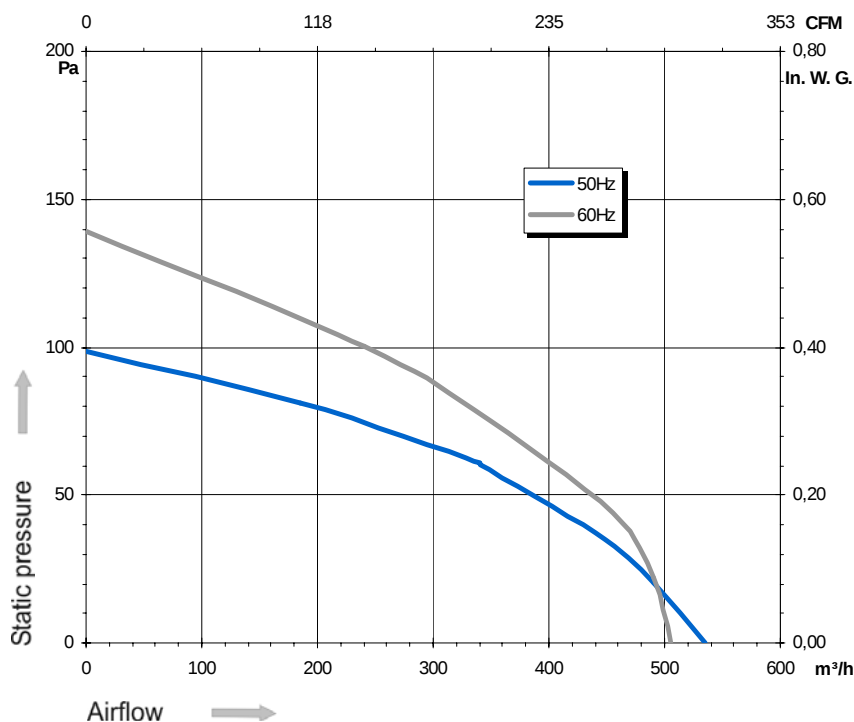



Ind. 0 - Revision : 01-2004

## 4GDSu20 133x190LR P/N C50-A6

| Voltage | Frequency | Input power | Current | Capacitor | Airflow | Speed rotation | Noise level | Rotation direction | Operating temperature |
|---------|-----------|-------------|---------|-----------|---------|----------------|-------------|--------------------|-----------------------|
| V       | Hz        | Wa          | A       | µF        | m³/h    | RPM            | dBA         | ↻                  | Min / Max             |
| 230     | 50        | 66          | 0,31    | 2,5       | 535     | 1 100          | 49          | L                  | -40°C / +70°C         |
| 230     | 60        | 66          | 0,55    | 2,0       | 505     | 1 055          | 49          | L                  | -40°C / +70°C         |

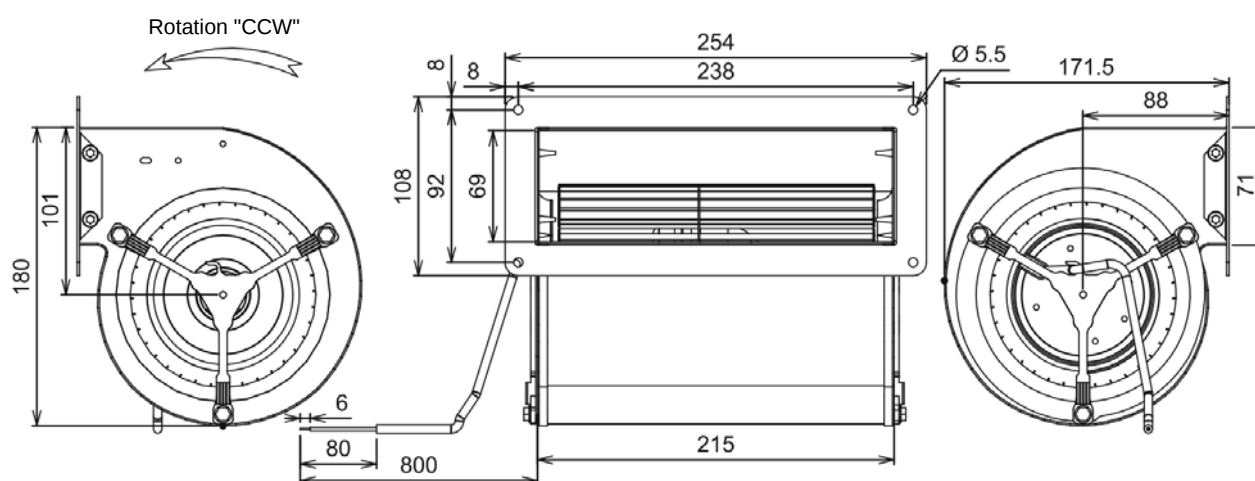

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Scroll housing : black paint
- Galvanized steel impeller
- UL approved motor

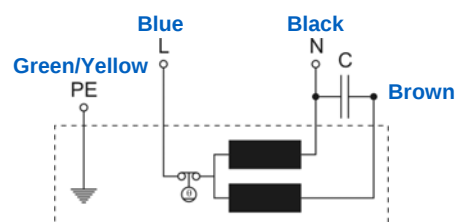

| Capacitor for 50Hz | Capacitor for 60Hz | Zinc Coated |
|--------------------|--------------------|-------------|
| 19218-0            | 19217-0            | 21236-a     |

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.