

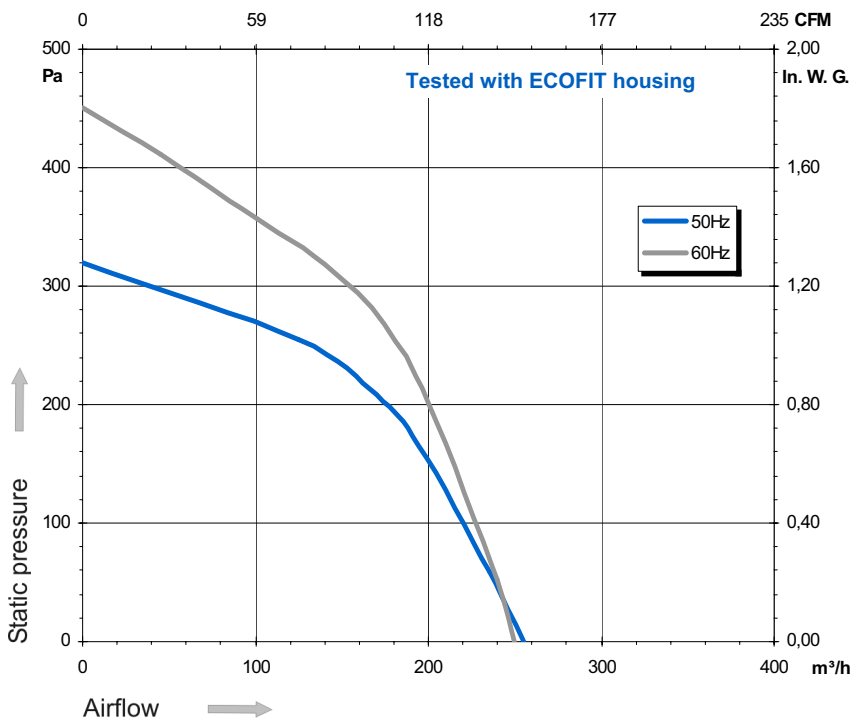
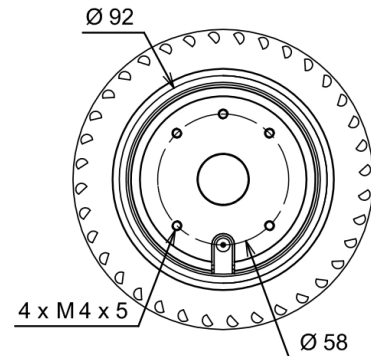


Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	75	0,33	2,0	255	2 210	57	R	-20°C / +70°C
230	60	92	0,41	2,0	250	2 170	57	R	-20°C / +70°C

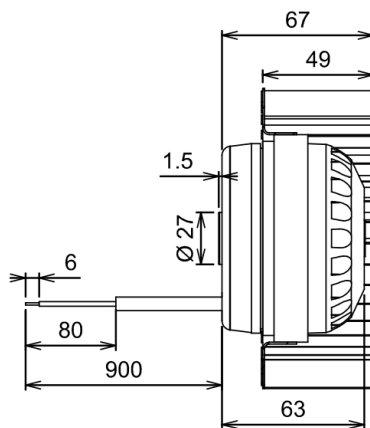

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Galvanized steel impeller
- Rotor : black paint

Capacitor for 50Hz 19008-0 Capacitor for 60Hz 19008-0 Zinc Coated 21236-a Inlet cone 16091-a

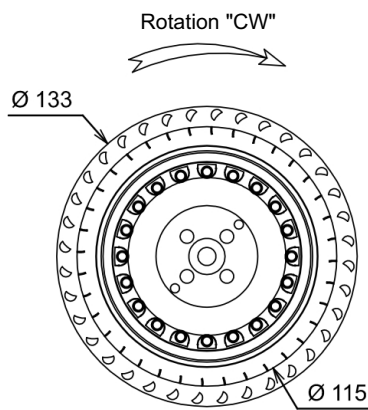