
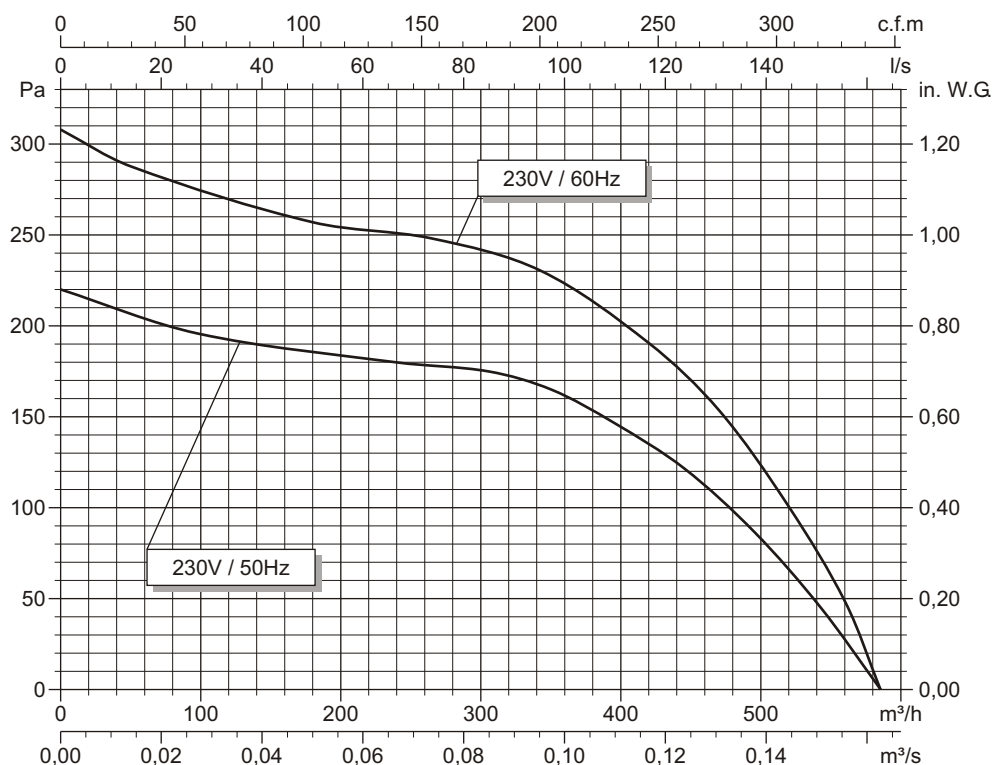
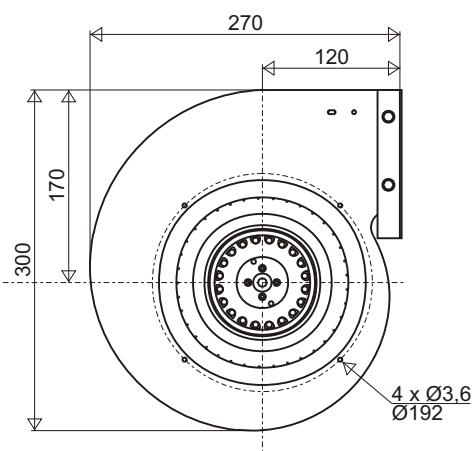


For professional use only. Please refer to the conditions of use of our catalogue.

March 2003

4GRE35 180x75R code Y41-07

Voltage	Frequency	Input power	Current	Capacitor	Air flow	Rotational speed	Sound level	Direction of rotation	Max. Air temp.
V	Hz	Wa	A	µF	m³/h	rpm	dBA		°C
230	50	102	0,45	3	585	1155	56	R	-20 / +60
230	60	114	0,51	2,5	585	1130	56	R	-20 / +60

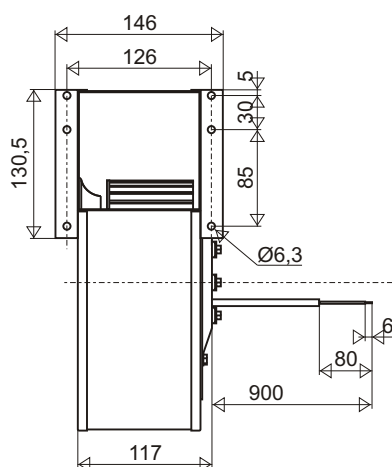

- Ball bearings.
- Cl.F windings protected by thermal cut-out.
- Protection IP 44.
- Balancing G2.5.
- Black plastic (polypropylene) impeller.
- Steel painted black scroll.

Capacitor for 50Hz	Capacitor for 60Hz	Finguer guard	Inlet cone
19008-0	19011-0	21194-a	16133-a

